


Product highlights

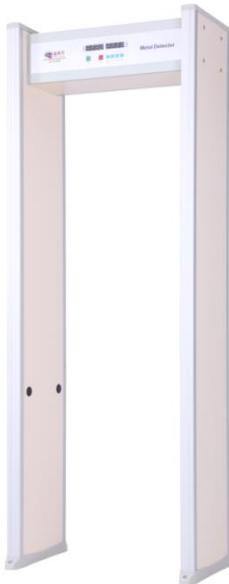

- *Single zone
- *MBSU backup battery (optional)
- *Inner size as 76cm width (less false alarm for big body passages)
- * Max distance between two Walk-thru:
0.3 meters at low Sensitivity,
0.5 meters at high sensitivity
- * Harmless to pregnant woman and heart pacemaker
Anti-interference standard: EN50082-1
- *DSP technology, automatically calibration
- *Weather-proof design (Aluminum Case)
- *LCD display

Electrical current:	AC100V~240V 50/60Hz
Power consumption:	12W
Work environment:	-20C to +55C
Gross Weight:	70kg
Outer frame:	2210mm(h)*830mm(w)*480mm(d)
Inner frame:	1980mm(h)*710mm(w)*408mm

General Specifications

- * Self-diagnostic procedures
- * Input MBSU battery backup, in time power transfer
- * Modular structure easy for after sales service
- * Automatically adapt to the working environment
- * Auto scan environmental interference at site
- * LCD friendly operation interface for user
- * Automatically calibration
- * Operation way: remote control
- * Two or four LED light bars on both door panels: gives alarm corresponding to the height or human body.
- |
 - * Sensitivity adjustable from Level 0 to 255
 - * High: Can detect a clip
 - * Low: Detect big metal articles such as: knife, gun, and copper, aluminums, zinc (more than 150g), ignoring metal in belt button, shoes.
 - * Shock proof to avoid false alarm
 - * Sound and light alarm
 - * Intelligent traffic and alarm counters that calculate traffic flow and resultant alarms.
 - * Tamper-Proof: operate program is protected by password.
 - * Adjustable operating frequencies---eliminate the potential effects from X-ray units, radios and other electrical interference sources.
 - * (Optional)Connect with computer, camera, turnstile

Compliance

International

•ISO9001 •ISO14001 •HSMS18001 •CE •FCC •ROHS

National
(China)

Certificate from Ministry of Public Security Safety and Police Electronic Products Quality Inspection Center
In accordance with: EN60950, WN50081-1, EN50082-1
Electric safety: EN60950
Anti-interference standard: EN50082-1

Operating Environment

Operation temperature/Humidity

-20C-45C / 0%-98%(non-condensing)

Storage temperature/Humidity

-20C-55C / 0%-98%(non-condensing)

Operation Power

220VAC (±10%) 50±3Hz (Optional: 100VAC,110VAC,120VAC,200VAC)